

Irradiation Chamber BS-03



Abb. 1: UV/VIS irradiation chamber BS-03 with dose controller UV-MAT

The irradiation chamber BS-03 is a midsize, robust equipment for the time- or dose-controlled uniform irradiation of samples with UV or visible light. The chamber can be fully equipped for one of the spectral regions UV-C, UV-B, UV-A or daylight D65 in order to get the highest irradiance. Alternately, the use of two separately controlled lamp groups for different spectral regions allows an especially flexible operation of the chamber.

The interior irradiation chamber has a footprint of 60x40 cm and a height of 27 cm.

The optional irradiation controller UV-MAT (see separate product sheet) controls the dose for two different spectral regions independently. The UV-MAT measures the dose with precise sensors calibrated against a PTB (Physikalisch-Technische Bundesanstalt) reference (see product sheets: Radiometer UV and VIS Sensors).


Applications

- Irradiation of bacteria and cell cultures
- Photostability testing
- UV and daylight materials testing
- UV curing, sealing and bonding

Lamp	Irradiance / Illuminance			
	UV-C mW/cm ²	UV-B mW/cm ²	UV-A mW/cm ²	VIS klx
UV-C	8	0.1	0.1	2
UV-B	0.1	4	3	3
UV-A	-	0.1	5	2
UV-A+		0.2	10	4
D-65			0.2	20

D-65: 1klx = 0.337mW/cm²

Table: Typical irradiances with a single lamp type

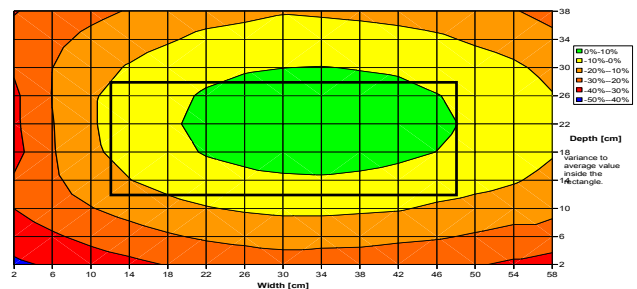

Technical Data

- Interior chamber: 60x40x27 cm
- Dimensions: 77 x 57 x 58.5 cm
- Weight: about 40 kg
- Mains: 230 VAC, 3 A
- Power consumption: 300 W (20 tubes with 15W)
UV-A+ 600W (20 tubes with 30W)
- Operation temperature: 10 to 40 °C
- Humidity: < 80%
Non-condensing

Part number

Irradiation chamber BS-03 860803

Options:

- 2 spectral regions
- Irradiation controller UV-MAT

Please indicate options and spectral ranges at ordering.

